



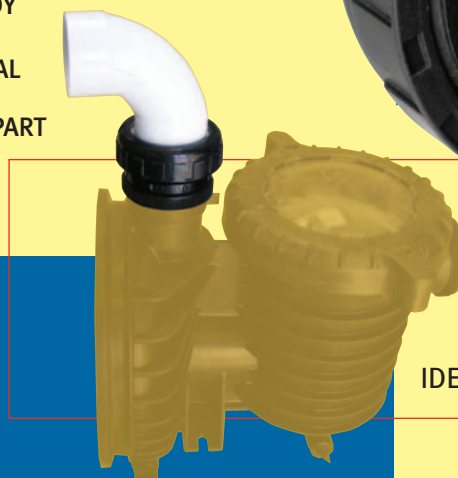

HIGH TEMPERATURE TRANSITION ADAPTER UNIONS SERIES 906

NO MORE: CRACKED THREADS, LEAKS, THREAD SEALANTS

ALL MODELS PATENT PENDING

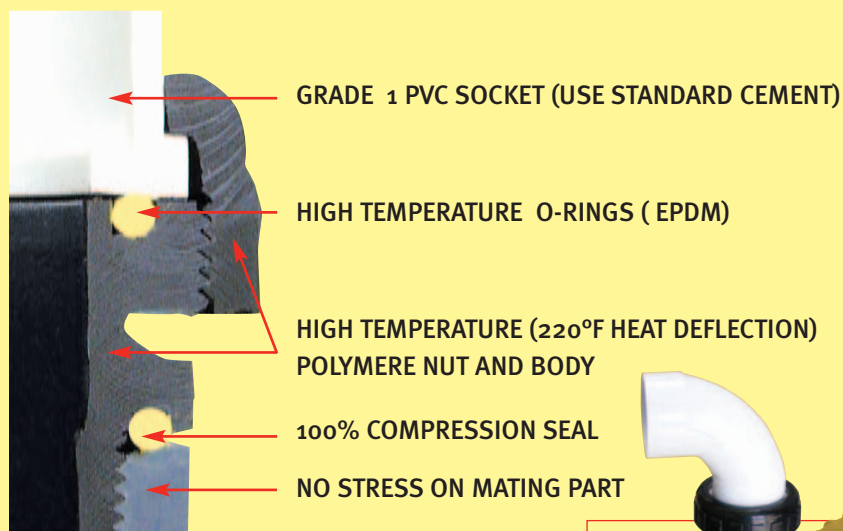

IDEAL PUMP UNION DISCONNECTS

MAXIMUM SERVICE SPECIFICATIONS 80°C/176°F @ 3.5 BAR/50PSI

- Designed to install into pump volute and suction connection to prevent the failure of high temperature build up in pump volutes when dry running pumps build up severe heat.
- Eliminates stressing outer thread of mating parts due to overtightening and possible consequent cracking.
- Eliminates the requirement of thread sealants while providing a reliable seal on the O-ring surface (high temp. EPDM).
- Provides easy installation while supplying a union connection for future servicing needs.

Hot!

www.praher valves.com

PRAHER VALVES CANADA phone: 705-725-1100 • fax: 705-725-0444 • 101 Saunders Rd., Barrie, Ontario L4N 6E7
PRAHER VALVES US SALES & MARKETING phone: 800 461-4915 fax: 512 240-4488

HIGH TEMPERATURE TRANSITION ADAPTER UNIONS SERIES 906



Hot!



Model 075-906

3/4" M x S union fitting for troublesome booster style pump connections

Model 150-906

1 1/2" male thread NPT with O-ring x 1 1/2" socket

Model 200-906

2" male thread NPT with O-ring x 2" socket

Model 216-906

1 1/2" male thread NPT (short) with O-ring x 2" socket

Model 215-906

1 1/2" male thread NPT with O-ring (long) x 2" socket
Fits on old version DURAGLASS pump with 1.5" threads.
Special length extension allows clearance of old style pump pot lids.

Model 200-996

2" male thread NPT with O-ring x 2" socket elbow sweep

www.prahervalves.com