


SUPERSTAR E-6000/F (3")

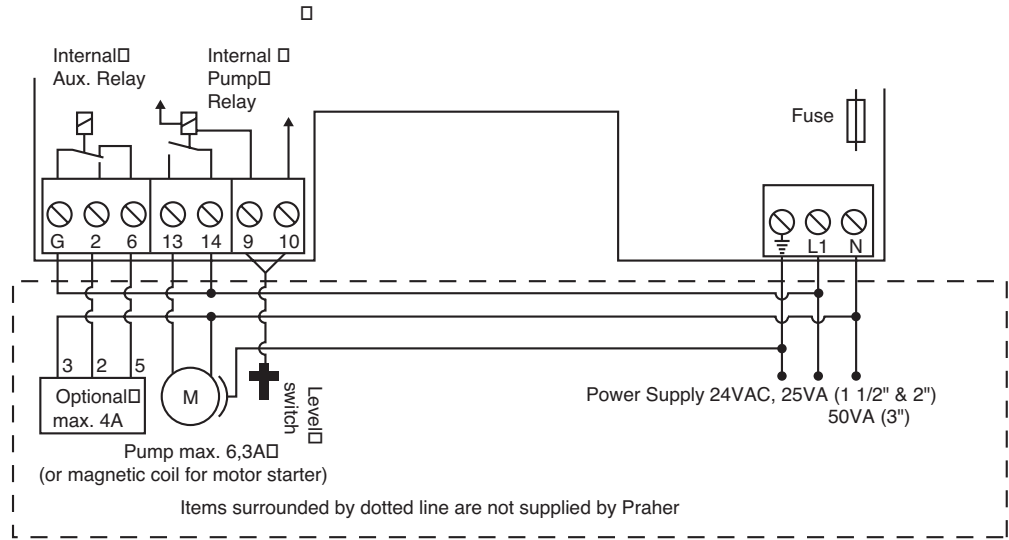

| | |
|--|--|
| Power supply | 24 VAC, 50 or 60Hz |
| Pump control relay (Terminal 13 & 14) | max. 6.3 Amp. |
| Ball valve auxiliary relay (Term. G, 2, & 6) | max. 4 Amp. |
| Available with the following pressure switches: | |
| MSPS-FF-100SS | range: 0.69 - 6.9 bar (10 psi - 100 psi) |
| MSPS-FF-15SS | range: 0.10 - 1.0 bar (1.45 psi - 14.5 psi) |
| Enclosure | IP 54 |
| Valve size | 3" (280 U.S. GPM max.) |
| Backwash time | adjustable with built in potentiometer: 1 min. - 11 min. |
| Rinse time | adjustable with built in potentiometer: 20 sec.-4 min. 20 sec. |
| Delayed pump cut in | 20 sec. |
| Pump and Backwash timer | "Graesslin" 2 channel digital timer with battery backup |
| Max. Valve operating pressure | 50 psi |
| Fireman cycle delay time | adjustable with built in potentiometer: 25 sec. - 25 min. |

SIDE MOUNTED VALVES

| | |
|--------|---------|
| | 3" |
| | inch |
| A | 6.69 |
| B | 13.0 |
| C | 1.97 |
| D | 3.37 |
| E | 4.33 |
| F | 12.0 |
| G | 17.16 |
| H | 1.97 |
| I | 6.5 |
| K | 13.0 |
| L | 9.84 |
| M | 6.3 |
| weight | 24 lbs. |

